


Energy Solutions Impregnating Resins

Voltatex® Product Overview

Low emission/ monomer-free/ epoxide

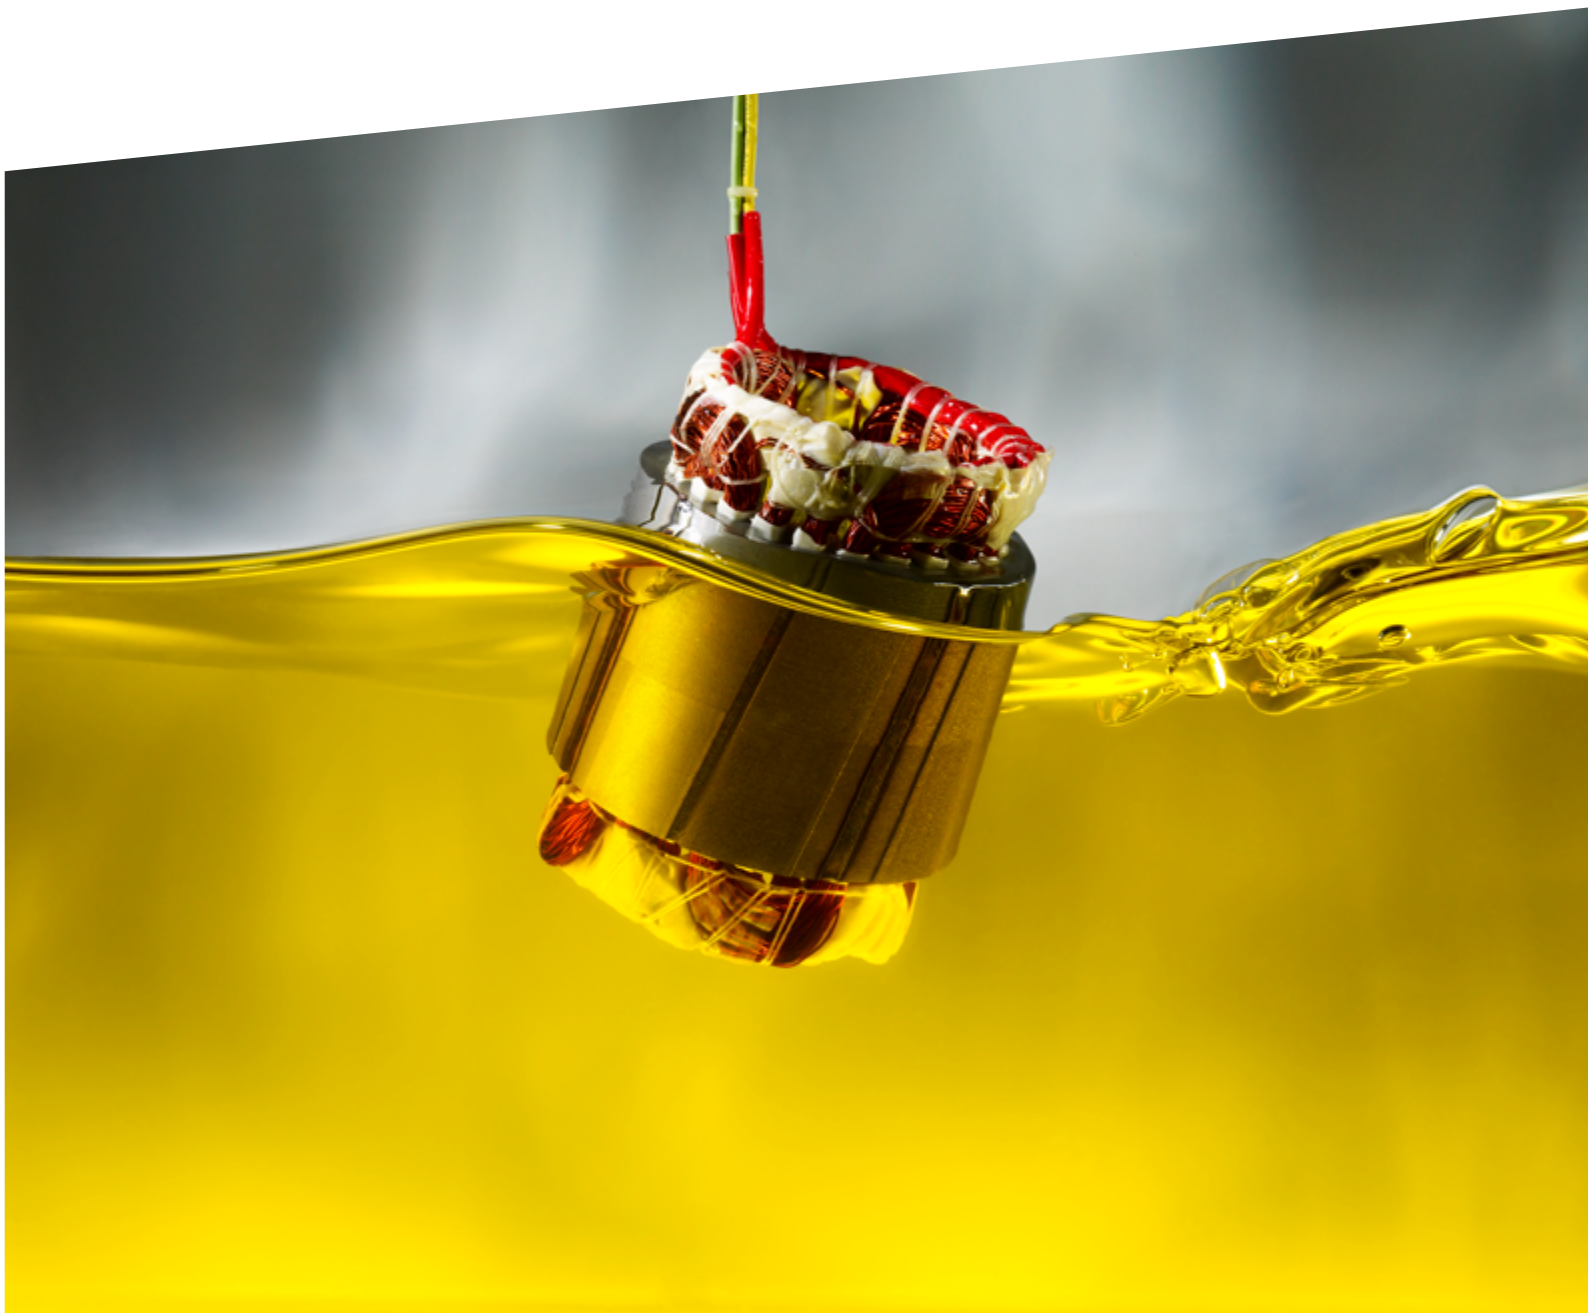

Energy Solutions - Impregnating Resins

Voltatex® Product Overview

Product Voltatex®	Key Characteristics	Thermal Class (IEC 60085)	UL-Recognition	Viscosity ⁽¹⁾ [mPas/cP]	Gel Time [min]	Curing Loss ⁽²⁾ [%]	Typical Curing Time
4200	Unsat PEI, one component, low emission, VOC-free	220 (R)	✓	1800-2700	7.0-13.0@ 100°C	≈1.2	1h @ 150°C
4201	Unsat PEI, one component, low emission	220 (R)	✓	700-1100	7.0-13.0@ 100°C	≈2.4	1h @ 150°C
4202	Modified unsat, PE, one-component, low emission, VOC-free	180 (H)	✓	1900-2600	9.0-15.0@ 100°C	≈2.2	1h @ 160°C
4204	Unsat PEI, one component, low emission, VOC-free	180 (H)	✓	265-365	7.0-12.0@ 100°C	≈1.1	30 min @ 150°C
4210	Modified unsat, PE, one-component, low emission, VOC-free	180 (H)	(✓)	700-1100	6.0-12.0@ 100°C	≈0.6	1h @ 150°C
4224 L	Unsat PEI, one component, low emission, VOC-free	180 (H)	✓	800-1200	8.0-14.0@ 100°C	≈1.4	30min @ 150°C
4224 M	Unsat PEI, one component, low emission, VOC-free	180 (H)	✓	1200-2000	8.0-14.0@ 100°C	≈1.1	30min @ 150°C
4224 H	Unsat PEI, one component, low emission, VOC-free	180 (H)	✓	2800-3800	8.0-14.0@ 100°C	≈0.8	30min @ 150°C
4230	Unsat PEI, one component, low emission	220 (R)	✓	700-1300	11.0-17.0@ 100°C	≈1.4	1h @ 150°C
4240	Unsat PEI, one component, low emission, VOC-free	180 (H)	✗	2300-3500	10.0-16.0@ 100°C	≈1.2	15min @ 150°C
4241	Unsat PEI, one component, low emission, VOC-free	180 (H)	✗	900-1600	15.0-25.0@ 100°C	≈1.3	15min @ 150°C
4250	Unsat PEI, one component, low emission, VOC-free	220 (R)	✓	1900-2600	7.5-13.5@ 100°C	≈1.7	1h @ 150°C
4302 M	Unsat PEI, one component, low emission, VOC-free	180 (H)	✗	5500-7700	10.0-16.0@ 100°C	≈0.5	1h @ 150°C
4303	Unsat PEI, one component, low emission, VOC-free	180 (H)	✓	700-1100	9.0-15.0@ 100°C	≈0.5	1h @ 150°C
4310	Unsat PEI, one component, low emission	180 (H)	✓	800-1200	4.5-7.5@ 100°C	≈2.0	15min @ 150°C
4401	Epoxy, one-component, VOC-free, anhydride-free	180 (H)	✓	2000-4000 @ 20°C	5.0-15.0@ 155°C	≈1.0	1h @ 165°C
4411	Epoxy, two-component, VOC-free, anhydride-free	180 (H)	✗	300-500 (mixture)	20.0-25.0@ 55°C	0	24h @ 25°C

✓ = listed
 (✓) = pending
 ✗ = not listed
⁽¹⁾ Measured at 25°C, unless otherwise specified
⁽²⁾ Emissions acc. DIN EN 60455-3-5

Shelf Life ⁽³⁾	Product Description	Typical Application	Dip & Bake (atmospheric)	Vacuum Process	VPI	Hot Dipping	Resistance Heating Process	UV-Curable	Trickle	Roll-Dip
suitable for:										
8 months	Outstanding thermal endurance, resistant to refrigerants	(H)EV-Motors, (Wind) Generators, Industrial Motors	(✓)	✓	✓	✓	✓	✗	✓	✓
8 months	Viscosity-reduced version of Voltatex® 4200 including ≤ 5% VT	(H)EV-Motors, (Wind) Generators, Industrial Motors	✓	✓	✓	(✓)	(✓)	✗	✓	✓
8 months	Suitable for traction motors up to 3.3 kV, very good dielectric properties	Electric-Motors, Traction Motors, Transformers, (Wind) Generators	(✓)	✓	✓	✓	✓	✗	✓	✓
8 months	Very low viscosity and tendency to crack, excellent penetration of taped conductors (VPI)	(H)EV, Industrial and Traction Motors,, (Wind)Generators, Designs>1000V	✓	✓	✓	✓	✓	✗	✓	✓
6 months	Low viscosity and tendency to crack, good stability against oil and humidity	(H)EV-Motors up to 1000 V, (Wind)Generators, Industrial Motors	✓	✓	✓	✓	✓	✗	✓	✓
12 months	Thermally conductive (≈ 0.5 - 0.6 W·(m·K) ⁻¹), partial discharge resistant, fast curing	Designs with increased needs of cooling, PD resistance	(✓)	(✓)	(✓)	✓	✓	✗	(✓)	✓
12 months	Thermally conductive (≈ 0.8 W·(m·K) ⁻¹), partial discharge resistant, fast curing	Designs with increased needs of cooling, PD resistance	(✓)	(✓)	(✓)	(✓)	✓	✗	(✓)	✓
12 months	Thermally conductive (≈ 1.2 W·(m·K) ⁻¹), partial discharge resistant, fast curing	Gelcoating, Hairpin Insulation	✗	✗	✗	✓	✗	✗	(✓)	✗
5 months @ ≤ 25°C	Viscosity-reduced and thixotropic version of Voltatex® 4200 including ≤ 5% VT	Electric Motors, (Wind) Generators, Large Drives, Transformers	✓	✓	✓	(✓)	(✓)	✗	✗	(✓)
8 months @ ≤ 25°C	Highly thixotropic gelcoat, high film build, thermal conductivity ≈ 0.5 W·(m·K) ⁻¹	Gelcoating, Hairpin Insulation	(✓)	✗	✗	(✓)	(✓)	✗	✓	✗
8 months	Viscosity-reduced flexible version of Voltatex®4240	Gelcoating, Hairpin Insulation	(✓)	✗	✗	(✓)	(✓)	✗	✓	✗
8 months	UV-curable version of Voltatex® 4200	(H)EV-Motors, (Wind) Generators, Industrial Motors	(✓)	(✓)	(✓)	(✓)	✓	✓	(✓)	(✓)
12 months	Monomer free resin, low odour, very low cracking*	(Wind) Generators, Large Drives	✗	(✓)	(✓)	✓	✓	✗	✗	✗
8 months	Monomer free resin, low odour, low viscosity	Electric Motors, (Wind) Generators Large Drives	✓	✓	✓	✓	✓	✗	✓	✓
4 months	High bond strength, excellent thermo-mechanical endurance	Power Tools	✗	✗	✗	✗	✗	✗	✓	✓
12 months @ ≤ 20°C	Accelerated curing (1 h @ 160 - 165 °C)	Low Voltage Traction Motors, Electric Motors	✓	✓	✓	✓	✓	✗	✓	✓
12 months	Ambient curing or at mild elevated temperatures	Stators and Rotors for Electric Motors	✗	✗	✗	✗	✗	✗	✓	✗

✓ = recommended
 (✓) = conditionally recommended (please consult us)
 ✗ = not recommended
⁽³⁾ Valid at ≤ 25°C, unless otherwise specified

Axalta Coating Systems Germany GmbH & Co. KG
Energy Solutions
Technical Service
Christbusch 25
D-42285 Wuppertal

www.electricalinsulation.com
electricalinsulation@axalta.com



The Axalta logo, Axalta™, Axalta Coating Systems™ and all products denoted with™ or® are trademarks or registered trademarks of Axalta Coating Systems, LLC and its affiliates. Axalta Trademarks may not be used in connection with any product or service that is not an Axalta product or service. Axalta Coating Systems 50 Applied Bank Blvd, Suite 300 Glen Mills, PA 19342 | 03/2024